



M.G. CABLE INDUSTRIES

Manufacturers : GI Cable Trays & All Earthing Materials

3/5, Ground Floor, Takwadi, Opp Yevale Tea Centre, Kalbadevi Road, Mumbai-400002. • Tel.: +91 22 4973 3629, 4913 7629
Cell : +91 96995 47310 • Email : mgcables29@gmail.com / info@mgcables.com • Website : www.mgcables.com

Authorised Stockist : **POLYCAB**
WIRES & CABLES



metroLITE
WIRES & CABLES

ELECTROLITE
WIRES & CABLES



Capillary Thermostats (As per IS-4165)

‘Saiego’ Capillary Thermostats (Hydraulic) are designed for accurate and reliable temperature control for Domestic appliances and Industrial Equipments. The assembly of these thermostats consist of capillary tube, sensing bulb & Diaphragm (Phial) filled with Liquid, fixed in the plated M.S. housing and moulded Bakelite switch base. A Black Bakelite Knob with white scale markings calibrated in °C is provided to set the desired temperature.

PRINCIPLE OF OPERATION :- With temperature rise the expansion of liquid filling the phial causes the opening of snap action switch located in the case i.e. a single pole single throw, normally closed circuit breaks (opens) on rise of temperature.

APPLICATIONS :- This instrument keeps constant within the differential the temperature of any fluid or solids heated by electricity, gas or oil. It is used in Washing machines, Coffee vending machines, Dishwashers, fryers. Electric cooker, Hotwater appliances, Ind. Boilers, Grills, Ovens, Deep fryer, cooking range, storage heater, oil Burners, sterilizer Roaster, Dryers, oil bath, water bath incubation other domestic and industrial equipments, plastic moulding machine, kitchen equipments & Laboratory instrument etc.


AVAILABLE ON REQUEST :- 1) COPPER CAPILLARY IN ANY LENGTH UPTO 3 Mtrs. 2) NORMALLY OPEN CONTACTS (NOC)
3) S.S. CAPILLARY 4) 20Amp contacts

15 AMP - 250 VOLTS A.C.

MODEL	TEMP. RANGE	CAPILLARY LENGTH.mm	BULB DIA.mm	BULB LENGTH.mm	PRICE PER PIECE	LOCAL PACKING	DISPATCH PACKING
-------	-------------	---------------------	-------------	----------------	-----------------	---------------	------------------

Sai Model Copper capillary thermostats having thermosetting base & metallic body

Sai-110	30 - 110°C	Ø 2 x 900	Ø6.35	100	₹. 260.00	25 Nos.	100 Nos.
Sai-300	50 - 300°C	Ø 2 x 900	Ø4.75	125	₹. 260.00	25 Nos.	100 Nos.

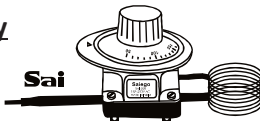

Super Deluxe Model Copper capillary thermostats having DMC base & Metallic body

SDLX-110	30 - 110°C	Ø 1.5 x 900	Ø6.35	105	₹. 220.00	25 Nos.	100 Nos.
SDLX-300	50 - 300°C	Ø 1.5 x 900	Ø4.75	80	₹. 220.00	25 Nos.	100 Nos.




Compaq Model Copper capillary thermostats having DMC base & bakelite body

COMPAQ-85	30 - 85°C	Ø 1 X 900	Ø6.35	115	₹. 185.00	50 Nos.	200 Nos.
COMPAQ-110	30 - 110°C	Ø 1 X 900	Ø6.35	115	₹. 185.00	50 Nos.	200 Nos.
COMPAQ-300	50 - 300°C	Ø 1 X 900	Ø4.75	75	₹. 185.00	50 Nos.	200 Nos.



SUN Model Copper/stainless steel capillary thermostats with metallic body.

SUN -110 Cu	30 - 110°C	Ø 1 X 900	Ø6.35	110	₹. 220.00	50 Nos.	200 Nos.
SUN -300 Cu	50 - 300°C	Ø 1 X 900	Ø4.75	75	₹. 220.00	50 Nos.	200 Nos.
SUN-110 SS	30 - 110°C	Ø 1 X 900	Ø6.00	100	₹. 240.00	50 Nos.	200 Nos.
SUN-300 SS	50 - 300°C	Ø 1 X 900	Ø3.00	170	₹. 240.00	50 Nos.	200 Nos.




Combi - Space Heaters with Built in Capillary Thermostat

‘Saiego’ Combi Space Heaters with built-in capillary Thermostat are ideal for prevention of condensation, corrosion, Leakage currents in L.T. & H.T. Switchgear panel boards / electronic instruments & panels etc. In this, a long life and sturdy aluminium sheathed heater and an accurate capillary thermostat are place in a Rust resistant perforated body. A 2 x 2.5 sq. mm porcelain terminal block is provided for electrical connection. Four side fixing tabs are provided for fitting the heater in the panel.

Each heater is tested for following specific tests: 1) High Voltage Test At 2Kv/1Min 2) Insulation Resistance > 10 Mega Ohms. 3) Power Rating within ± 5% 4) Thermostat Calibration

TYPE NO.	WATTS	VOLTS	TEMP. RANGE	SIZE in mm	PRICE EACH	PACKING
CSHT/006/220	60	230	25 - 85°C	220x75x38	₹. 625.00	25Nos
CSHT/008/220	80	230	25 - 85°C	220x75x38	₹. 625.00	25Nos
CSHT/004/250	40	230	25 - 85°C	250x75x38	₹. 725.00	25Nos
CSHT/010/250	100	230	25 - 85°C	250x75x38	₹. 725.00	25Nos

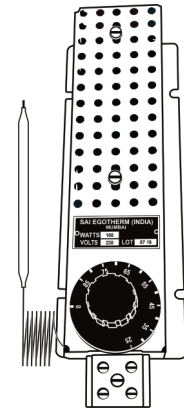

PTC Space Heaters (with DIN Rail Mounting)

These heaters are used in enclosures where damage from condensation must be prevented, or where the temperature must be maintained above a minimum value. These are made with PTC resistor, which is self regulating and temperature limiting. The aluminum profile heater body design has a chimney effect to distribute heat evenly. The pressure clamp connectors save time and simplify installation.

MODEL NO	WATTAGE AT 220V	INRUSH CURRENT MAX.	LENGTH (L)	PRICE EACH	STD. PACKING
HGG/0015/65	15W	1.5A	65mm	₹.1305.00	6 Nos.
HGG/003/65	30W	3.0A	65mm	₹.1350.00	6 Nos.
HGG/0045/65	45W	3.5A	65mm	₹.1395.00	6 Nos.
HGG/0065/140	65W	2.5A	140mm	₹.1485.00	6 Nos.
HGG/0075/140	75W	4.0A	140mm	₹.1530.00	6 Nos.
HGG/010/140	100W	4.5A	140mm	₹.1575.00	6 Nos.
HGG/015/220	150W	9.0A	220mm	₹.1710.00	6 Nos.






TERMS: 1) EX-GODOWN BASIS - TAXES EXTRA - EX. STOCK.-DOCUMENTS THROUGH BANK.
2) NO GUARANTEE FOR BREAKAGE OF CAPILLARY, PORCELAIN & BAKELITE PARTS.
3) ONE YEAR GUARANTEE AGAINST MFG. DEFECTS.

ENERGY REGULATORS


‘Saiego’ range of Energy regulators are designed to control the heat from zero to full by simply turning the knob. These are used in OTG., drying cabinets, wash boilers, boiling rings hot plates, grills, boilers. Thermoplastic & Thermosetting moulding machines, oil baths, switchgear & panel board and other domestic, commercial & industrial heating equipments.

PRINCIPLE OF OPERATION: These have snap action switch which opens and closes the load circuit at precise time intervals. The proportion of time ‘on’ to ‘off’ can be varied regulating the average power input and assuring a smooth output of heat.

CONSTRUCTION : There are ten arbitrary divisions from zero to full on the scale marked on a black dial with a control knob. The entire switch mechanism is mounted on a heavy duty ‘porcelain base in ‘SUMO’ and on a heat resistant thermosetting/thermoplastic base in ‘SUNSIM’ & ‘SUNTEK’ ‘ and is protected with a cover which withstands temperature conditions where it is designed to function. All internal parts are made heavy duty for long troublefree life. Variation of ambient temperature of upto 85°C and compensation for voltage fluctuations of upto 15% are both automatic. Within these limits the rate of heat output will not be affected once the switch is set. A thread bush with registering lugs is provided for fixing. It can be fitted in any convenient position on the control panel as there is no thermal contact.



HEAT CONTROL BOX

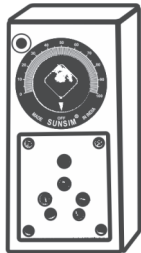


Available with
SUNSIM /SUNTEK or
SUMO Regulator
with or without FUSE
Price on Request

Model Name	Operating Voltage	Wattage Capacity	Price per Piece	Local Packing	Dispatch Packing
SUNTEK	200/250V AC	Light Duty	₹. 135.00	50 Nos.	200 Nos.
SUNSIM	200/250V AC	Light Duty	₹. 145.00	50 Nos.	200 Nos.
SUMO	230V AC	Heavy Duty	₹. 340.00	10 Nos.	60 Nos.

ENCLOSURE THERMOSTATS (WITH DIN RAIL MOUNTING)

Enclosure Thermostats are compact thermostats with DIN rail mounting designed for use in electronic, IT or control panel cabinets. They work with heating or cooling devices to ensure a safe operating temperature and safeguard against condensation, humidity and frost. Colour coded knob is provided for NCC type (Red) or NOC type (Blue) thermostats.


Model	Temp. Range	Contact Type	Price	Packing
KSTO-011 60	0 - 60°C	Normally Closed	₹.415.00	10Nos.
KSTO-011 80	0 - 80°C	Normally Closed	₹.430.00	10Nos.
KSTS-011 60	0 - 60°C	Normally Open	₹.430.00	10Nos.
KSTS-011 80	0 - 80°C	Normally Open	₹.445.00	10Nos.

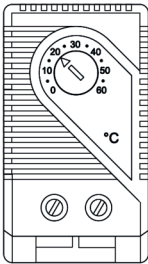

DUAL THERMOSTATS (WITH DIN RAIL MOUNTING)

Dual Thermostat houses two separate thermostats, allowing the independent control of heating and cooling or other equipment. Both thermostats offer wide adjustment ranges and are color coded for easy function recognition.


Model	Temp. Range	Contact Type	Price	Packing
ZSR-011	0-60°C	One Normally Closed + One Normally Open	₹. 990.00	5Nos.



MECHANICAL HYGROSTAT (WITH DIN RAIL MOUNTING)


Mechanical Hygrostat is designed to control the relative air humidity inside of enclosures. When connected to an enclosure heater, (de-humidifier), it will turn the heater on at the set humidity level in order to raise the dew point. This helps prevent damage and malfunction of electronic components caused by condensation and corrosion*. It can also be used to control cooling fans, warning lights or other devices.

Model	R.H.Range	Contact Type	Price	Packing
MSFR-012	35-95% RH	Change Over Contact	₹. 2700.00	5 Nos.




Coming Soon


Electronic
Thermostat



Electronic
Hygrostat



Electronic
Thermostat with
Hygrostat (Hygrotherm)



Panel Light



ENCLOSURE
FAN HEATERS




TERMS: 1) EX-GODOWN BASIS - TAXES EXTRA - EX. STOCK - DOCUMENTS THROUGH BANK.
2) NO GUARANTEE FOR BREAKAGE OF BAKELITE + PORCELAIN PARTS.
3) ONE YEAR GUARANTEE AGAINST MFG. DEFECTS.




CM/L-7366683

.E.F. 01-09-2020

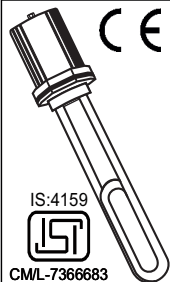
Girish-heat® Brand ISI marked Heating Elements**COMMERCIAL WATER IMMERSION HEATERS**IS:4159
CML-7366683

Copper tubular sheathed nickel plated for heating water, Light duty (intermittent) boilers, sterilizers and for other commercial purposes.

Type	Watts	Volts	Depth Immer	Flange	Price Each.₹.	Std. Pkg.
CH/10/220	1000	230	220 mm	1¼" BSPT	870.00	12
CH/15/220	1500	230	220 mm	"	1000.00	12
CH/20/325	2000	230	325 mm	"	1155.00	12
CH/30/425	3000	230	425 mm	"	1315.00	12

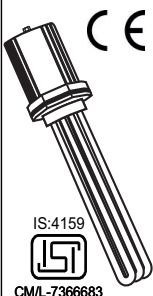IS:4159
CML-7366683

Copper tube, nickel plated heating elements for heating of water and industrial hotwater baths, water jacketed apparatus, side arm circulating process tanks etc. fitted with metallic cap for protection of terminals.




ALSO AVAILABLE WITH FLAME PROOF COVER

INDUSTRIAL WATER IMMERSION HEATERS

Type	Watts	Volts	Depth Immer	Flange	Price Each.₹.	Std. Pkg.
IH/20/220	2000	230	220 mm	1¼" BSPT	1185.00	12
IHS/20/220	2000	230	220 mm	1½" "	1315.00	12
IH/30/280	3000	230	280 mm	1¼" "	1405.00	12
IH/30/220	3000	230/400Y	220 mm	1¼" "	1595.00	12
IHS/30/220	3000	230/400Y	220 mm	1½" "	1715.00	12
IHT/30/220	3000	230/400Y	220 mm	2" "	1975.00	12
IHT/40/260	4000	230/400Y	260 mm	2" "	2065.00	12
IHT/50/320	5000	230/400Y	320 mm	2" "	2315.00	12
IHT/60/380	6000	230/400Y	380 mm	2" "	2410.00	12
IHT/90/550	9000	230/400Y	550 mm	2" "	3385.00	12
IHX/120/575	12000	230/400Y	575 mm	2½" "	5250.00	6


Also available: 15KW, 18KW, 21KW & 24KW water heaters in 2½" BSPT Flange

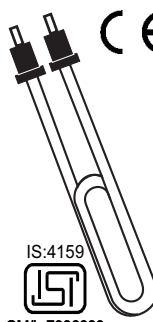IS:4159
CML-7366683

Copper tubular sheathed nickel plated for heating water, Light duty (intermittent) boilers, sterilizers and for other commercial purposes.

'U' SHAPE WATER HEATERS (Having Threaded 1/2" dia Nipple with Checknut)


Type	Watts	Volts	Depth Immer	Mounting	Price Each	Std. Pkg.
CHN/.25/220	250	230	220 mm	½" dia Nipple with Checknut	605.00	12
CHN/05/220	500	230	220 mm	"	605.00	12
CHN/.75/220	750	230	220 mm	"	605.00	12
CHN/10/220	1000	230	220 mm	"	605.00	12
CHN/15/220	1500	230	220 mm	"	705.00	12
CHN/20/325	2000	230	325 mm	"	820.00	12
CHN/25/380	2500	230	380 mm	"	880.00	12
CHN/30/425	3000	230	425 mm	"	940.00	12

IS:4159
CML-7366683

Copper tubular sheathed nickel plated with Thermostat pocket for heating water in solar water heater tanks as a backup heater.

HEATING ELEMENTS FOR SOLAR HEATERS

Type	Watts	Volts	Depth Immer	Mounting	Price Each	Std. Pkg.
SOLAR/20/280	2000	230	280 mm	1¼" BSPT with Thermostat	995.00	12
SOLAR/30/280	3000	230	280 mm	"	1025.00	12

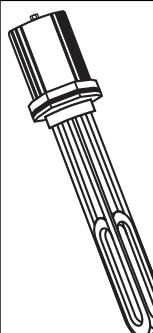
IS:4159
CML-7366683

Cast iron flange with thermostat pocket and cap suitable for fuel oil heating, oil circulating, for systems which supply hot oil to plastic processes, oil jacketed kettles and similar equipments.

OIL IMMERSION HEATERS along with Check Nut & Washers

Type	Watts	Volts	Depth Immer	Flange	Price Each.₹.	Std. Pkg.
OIH/10/438	1000	230	438 mm	2½" BSPT	1520.00	12
OIH/15/438	1500	230	438 mm	"	1700.00	12
OIH/20/438	2000	230	438 mm	"	1920.00	12
OIH/30/438	3000	230/400Y	438 mm	"	2200.00	12
OIH/40/575	4000	230/400Y	575 mm	"	2510.00	12
OIH/50/575	5000	230/400Y	575 mm	"	2905.00	12
OIH/60/575	6000	230/400Y	575 mm	"	3040.00	12
OIH/90/575	9000	230/400Y	575 mm	"	4295.00	6

Brand ISI Marked Heating Elements

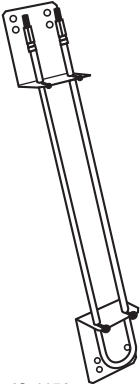


The heaters are made out of 8.2 to 8.5 mm dia Chrome Nickel Steel Tube with adjustable brackets. Maximum surface temperature 650°C. These Air heaters are suitable for efficient baking and curing of plants, enamels, lacquers adhesives etc. Specially suited for exposed and semi exposed areas.

IS:4159
CML-7366683

LONG LIFE 'U' SHAPE AIR HEATERS DELUXE (CR-NI Steel Tube)

TYPE	Watts	Volts	Length	Breadth	Height	Mounting	Price Each ₹.	Std. Pkg.
UAH/05/250	500	230	250mm	55mm	40mm	Two	315.00	12
UAH/.75/450	750	230	450mm	55mm	40mm	adjustable	445.00	12
UAH/10/610	1000	230	610mm	55mm	40mm	Brackets	540.00	12
UAH/10/762	1000	230	762mm	55mm	40mm	"	635.00	12
UAH/15/610	1500	230	610mm	55mm	40mm	"	610.00	12
UAH/15/762	1500	230	762mm	55mm	40mm	"	680.00	12
UAH/15/900	1500	230	900mm	55mm	40mm	"	825.00	12
UAH/15/1000	1500	230	1000mm	55mm	40mm	"	885.00	12
UAH/20/1000	2000	230	1000mm	55mm	40mm	"	915.00	12

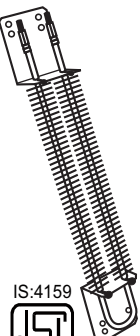


Made out of 8.2 to 8.5 mm dia Chrome Nickel Steel Tube fitted with 34mm dia M.S. Finns mounted on the top with adjustable brackets. Designed for rapid and uniform heat transfer for forced air heating Depending upon the space available.

IS:4159
CML-7366683

LONG LIFE 'U' SHAPE FINNED HEATERS DELUXE (CR-NI Steel Tube) with M.S. Fins (DIA-34mm)


TYPE	Watts	Volts	Length	Breadth	Height	Price Each ₹.	Std. Pkg.
UAHF/05/250	500	230	250mm	70mm	40mm	455.00	12
UAHF/.75/450	750	230	450mm	70mm	40mm	655.00	12
UAHF/10/610	1000	230	610mm	70mm	40mm	875.00	12
UAHF/10/762	1000	230	762mm	70mm	40mm	1070.00	12
UAHF/15/610	1500	230	610mm	70mm	40mm	960.00	12
UAHF/15/762	1500	230	762mm	70mm	40mm	1115.00	12
UAHF/15/900	1500	230	900mm	70mm	40mm	1285.00	12
UAHF/15/1000	1500	230	1000mm	70mm	40mm	1415.00	12
UAHF/20/900	2000	230	900mm	70mm	40mm	1315.00	12
UAHF/20/1000	2000	230	1000mm	70mm	40mm	1450.00	12

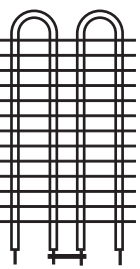

Made out of Two 8.2 to 8.5 mm dia Chrome Nickel Steel Tube fitted with 100mm x 50mm M.S. Finns. Designed for rapid and uniform heat transfer for de-humidifiers & HVAC applications.

DE-HUMIDIFIER HEATERS (with 4 Hole M.S. Finns)

TYPE	Watts	Volts	Length	Width x Breadth	Price Each ₹.	Std. Pkg.
DHH/12.5/225	1250	230	225 mm	50x100mm	1050.00	6
DHH/17.5/305	1750	230	305 mm	50x100mm	1575.00	6

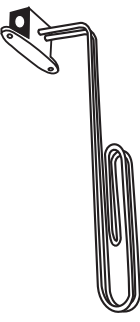

Made out of 8.2 to 8.5 mm dia chrome nickel steel tube for mounting on side of vessels. Easy to remove and clean; fitted with a junction box for terminating the power line. Suitable for alka-line solutions to 90°C.

ALKALI IMMERSION HEATERS (S.S. Tube) For Vertical Use

TYPE	Watts	Volts	Vertical Length	Ineffective Length	Price Each ₹.	Std. Pkg.
AIH/10/460	1000	230	460 mm	150 mm	1745.00	12
AIH/20/610	2000	230	610 mm	150 mm	1860.00	12
AIH/30/685	3000	230	685 mm	305 mm	2020.00	12
AIH/40/685	4000	230	685 mm	305 mm	2665.00	12



Made of Lead bonded chrome nickel steel / Titanium tube for mounting on side of vessels. Easy to remove and clean; fitted with a junction box for terminating the power line. Suitable for Chemical* solutions to 90°C.

CHEMICAL IMMERSION HEATERS (Tubular) For Vertical Use

TYPE	Watts	Volts	Vertical Length	Ineffective Length	Price Each ₹.	Std. Pkg.
LEAD BONDED TUBULAR IMM. HEATERS						
LBIH/30/685	3000	230	685 mm	305 mm	Available	6
TITANIUM SHEATHED IMM. HEATERS						
TIH/30/685	3000	230	685 mm	305 mm	on Request	6

Note* : Refer corrosion guide for selection of heater

Brand Heating Elements As Per IS-3724

STRIP HEATERS

Strip Heaters: Made of Kanthal wire, supported in Fluted Refractory sheathed in rust resisting steel with end tab holes for mounting. Used in ovens, strip and commercial heating chambers and

STRIP HEATERS Popular Model (Refractory Insulated) :-

Type No.	Length	Width	Thick	Fixing Holes Cen to Cen.	Load 230V	Price Each	Std. Pkg
SER-12	305 mm	38 mm	9.5 mm	280mm	500W	205.00	25
SER-15	380 mm	38 mm	9.5mm	355mm	500W	215.00	25
SER-18	457 mm	38 mm	9.5 mm	432mm	750W	240.00	25
SER-21	533 mm	38 mm	9.5 mm	508mm	1000W	290.00	25
SER-24	610 mm	38 mm	9.5 mm	585mm	1000W	340.00	25
SER-27	685 mm	38 mm	9.5 mm	660mm	1000W	425.00	25
SER-30	762 mm	38 mm	9.5 mm	735mm	1500W	435.00	25
SER-36	915 mm	38 mm	9.5 mm	890mm	2000W	480.00	25


STRIP HEATERS Heavy Duty Model (Refractory Insulated):-

SEHD-12	305 mm	45 mm	11 mm	280mm	500W	215.00	25
SEHD-15	380 mm	45 mm	11 mm	355mm	500W	240.00	25
SEHD-18	457 mm	45 mm	11 mm	432mm	750W	260.00	25
SEHD-21	533 mm	45 mm	11 mm	508mm	1000W	305.00	25
SEHD-24	610 mm	45 mm	11 mm	585mm	1000W	355.00	25
SEHD-27	685 mm	45 mm	11mm	660mm	1000W	455.00	25
SEHD-30	762 mm	45 mm	11 mm	735mm	1500W	465.00	25
SEHD-36	915 mm	45 mm	11 mm	890mm	2000W	525.00	25

STRIP HEATERS For Panel Board (Refractory insulated)

SER-09-SP	228 mm	38 mm	9.5 mm	203mm	40W	175.00	25
SER-09-SP	228 mm	38 mm	9.5 mm	203mm	60W/80W	175.00	25
					100W	175.00	25
SER-12-SP	305 mm	38 mm	9.5 mm	280mm	40W	205.00	25
SER-12-SP	305 mm	38 mm	9.5 mm	280mm	60W/80W	205.00	25
					100W	205.00	25
					250W	205.00	25

STRIP
HEATERS

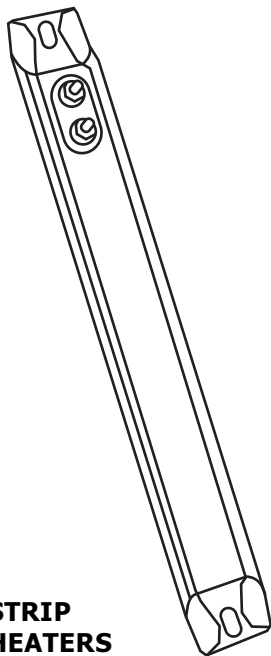


FINNED STRIP HEATERS

Finned Strip Heaters: Basically a Heavy Duty strip heater with locked fins for fast transfer of heat to air. Used in forced air ducts, blower units, ovens, dryers etc. Preferably Horizontal Mounting.

Type No.	Length	Width	Thick	Holes Center	Load 230 V	Price ₹Each	Std. Pkg
SERF-9	228mm(09")	65mm(2.1/2")	35mm(1.3/8")	203 mm	500 W	325.00	12
SERF-12	305mm(12")	" "	" "	280 mm	500 W	375.00	12
SERF-12	305mm(12")	" "	" "	280 mm	750 W	395.00	12
SERF-15	380mm(15")	" "	" "	355 mm	500 W	420.00	12
SERF-15	380mm(15")	" "	" "	355 mm	750 W	475.00	12
SERF-15	380mm(15")	" "	" "	355 mm	1000 W	530.00	12
SERF-18	457mm(18")	" "	" "	432 mm	500 W	540.00	12
SERF-18	457mm(18")	" "	" "	432 mm	750 W	555.00	12
SERF-18	457mm(18")	" "	" "	432 mm	1000 W	575.00	12
SERF-21	533mm(21")	" "	" "	508 mm	1000 W	640.00	12
SERF-21	533mm(21")	" "	" "	508 mm	1250 W	650.00	12
SERF-24	610mm(24")	" "	" "	585 mm	1000 W	710.00	12
SERF-24	610mm(24")	" "	" "	585 mm	1250 W	760.00	12
SERF-24	610mm(24")	" "	" "	585 mm	1500 W	790.00	12
SERF-27	686mm(27")	" "	" "	661 mm	1000 W	820.00	12
SERF-27	686mm(27")	" "	" "	661 mm	1500 W	850.00	12
SERF-27	686mm(27")	" "	" "	661 mm	2000 W	860.00	12
SERF-30	762mm(30")	" "	" "	737 mm	1000 W	880.00	12
SERF-30	762mm(30")	" "	" "	737 mm	1500 W	885.00	12
SERF-30	762mm(30")	" "	" "	737 mm	2000 W	910.00	12
SERF-30	762mm(30")	" "	" "	737 mm	2500 W	935.00	12
SERF-30	762mm(30")	" "	" "	737 mm	3000 W	950.00	12
SERF-33	838mm(33")	" "	" "	813 mm	2000 W	990.00	12
SERF-33	838mm(33")	" "	" "	813 mm	2500 W	1015.00	12
SERF-33	838mm(33")	" "	" "	813 mm	3000 W	1025.00	12
SERF-36	915mm(36")	" "	" "	890 mm	2000 W	1125.00	12
SERF-36	915mm(36")	" "	" "	890 mm	3000 W	1130.00	12
SERF-42	1066mm(42")	" "	" "	1041 mm	3000 W	1215.00	12
SERF-48	1220mm(48")	" "	" "	1195 mm	3000 W	1510.00	12
SERF-48	1220mm(48")	" "	" "	1195 mm	3500 W	1520.00	12
SERF-48	1220mm(48")	" "	" "	1195 mm	4000 W	1575.00	12

N.B.: Finned Strip heaters of higher wattage in small length are for Air-conditioning use only.

FINNED
STRIP
HEATERS

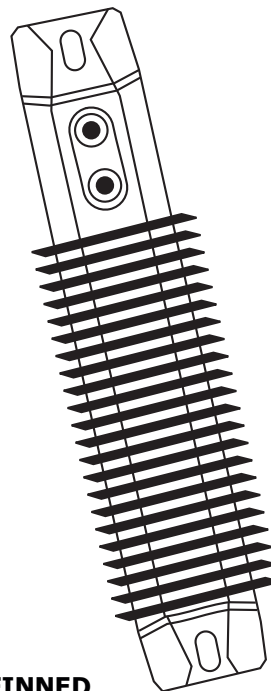

SILICA CASED IMMERSION HEATERS (Re-Wireable)

Silica Cased immersion Heater- Made of imported fused silica tubing with removable heating element inside, provided with heat resistant rubber cap and a connecting cable. It can be used at highest temperatures in all acids, ferric chloride baths, anodising, bright dip baths, except hydrofluoric and phosphoric.

TYPE	Watts	Voltage	Heating Length		Total	Price Each ₹.
			Ineffective	Effective		
SIL/10/450	1000	230	150 mm	300 mm	450 mm	2555.00
SIL/20/600	2000	230	150 mm	450 mm	600 mm	3305.00
SIL/30/750	3000	230	150 mm	600 mm	750 mm	4195.00
SIL/40/900	4000	230	150 mm	750 mm	900 mm	5240.00


SILICA
CASED
IMMERSION
HEATER



CORRUGATING M/C. HEATERS




RADIANT HEATER




SONA BATH HEATER

Brand Heating Elements As Per IS-3724

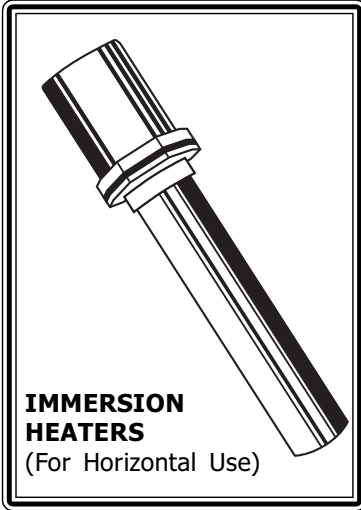


IMMERSION
HEATERS
(For Horizontal Use)

IMMERSION HEATERS For Horizontal Use (Re-Wireable)							
Immersion Heaters For Horizontal use (Rewirable, Bobbin type) :- Made from M.S./S.S. pipe welded with C.I./S.S. flange with replaceable refractory insulated heating element inside. Used to heat water, oil, food stuff, alkaline solutions, anodising and plating baths etc.							
TYPE	Sheathing	Watts	Volts	Depth Immer.	Flang	Price Each	Std. Pkg
SSBT/10/300	Stainless	1000	230	300mm	2"BSPT	2760.00	6
SSBT/15/300	Steel Tube	1500	230	300mm	2"BSPT	2820.00	6
SSBT/20/450	with	2000	230	450mm	2"BSPT	3345.00	6
SSBT/20/600	S.S. Flange	2000	230	600mm	2"BSPT	3635.00	6
SSBT/30/600	"	3000	230/400Y	600mm	2"BSPT	3830.00	6
SSBT/30/750	"	3000	230 " "	750mm	2"BSPT	4350.00	6
SSBT/40/750	"	4000	230 " "	750mm	2"BSPT	4455.00	6
SSBT/40/900	"	4000	230 " "	900mm	2"BSPT	4820.00	6
SSBT/50/900	"	5000	230 " "	900mm	2"BSPT	4955.00	6

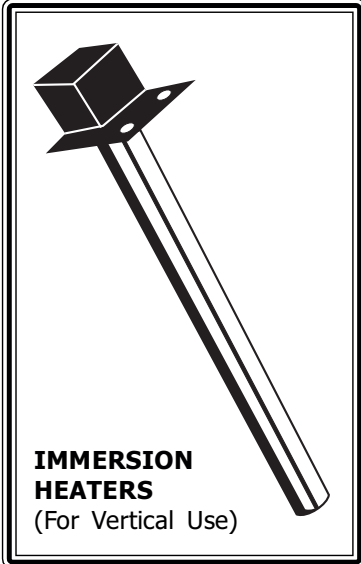

IMMERSION
HEATERS
(For Vertical Use)

IMMERSION HEATERS For Vertical Use (Re-Wireable)									
IMMERSION HEATER for vertical use (Rewirable, Bobbin type) Made from M.S./S.S. Titanium or Lead bonded pipe with clamp plate, with replacable refractory insulated heating element inside Used in water, oil, foodstuff, alkaline solutions, anodising and plating baths etc. Lead Bonded heater, used in phosphoric acid, chromic acid etc. Titanium heaters used in Nitric and chromic acid solutions etc.									
TYPE	Watts	Sheathing	Volts	Heating Ineffect	Length Effect.	Total Length	Fixing ₹ Clamp	Pric Each	Std. Pkg
SSBV/10/300	1000	Stainless Steel	230	100mm	200mm	300mm	100 x 125	1795.00	6
SSBV/15/450	1500	"	230	150mm	300mm	450mm	mm mm	2175.00	6
SSBV/20/600	2000	"	230	150mm	450mm	600mm	" "	2470.00	6
SSBV/30/750	3000	"	230	150mm	600mm	750mm	" "	2785.00	6
SSBV/40/900	4000	"	230	150mm	750mm	900mm	" "	3330.00	6
TIT/15/450	1500	Titanium	230	150mm	300mm	450mm	75 x 100	2490.00	6
TIT/20/600	2000	"	230	150mm	450mm	600mm	mm mm	2905.00	6
TIT/30/750	3000	"	230	150mm	600mm	750mm	" "	3250.00	6
TIT/40/900	4000	"	230	150mm	750mm	900mm	" "	3620.00	6

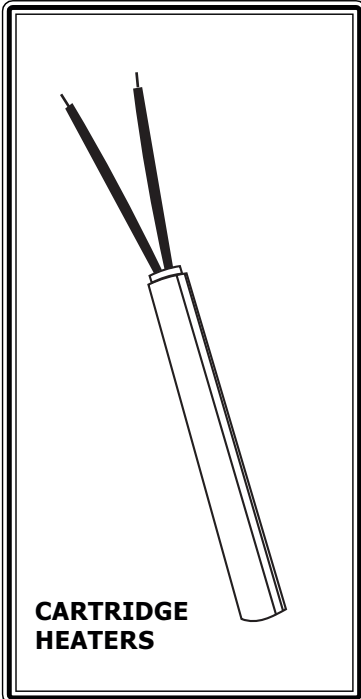

CARTRIDGE
HEATERS

CARTRIDGE HEATERS Incased in Brass Sheath


Cartridge Heaters : It is a brass tube sheathed refractory insulated heater provided with 4" Long Beaded wire for terminals. Used in dies moulds, platens, revolving rolls, plastic injection and extrusion barrels, carton making machines & shoe making machines etc.

- Wattage are given at 230 volts, it can be supplied in any voltages.
- Can be supplied in any minimum wattage the price will be same.
- 1¼ Ø heater has screw type terminals.
- Can be made in S.S., M.S. or Incoloy tubes.
- Can be made in 7/16"Ø, 9/16"Ø, 11/16"Ø, 15/16"Ø, 2"Ø and any mm

STANDARD PACKING
12 NOS. EACH


Length	3/8"	Price	1/2"	Price	5/8"	Price	3/4"	Price	7/8"	Price	1"	Price	1¼"	Price
	Max	each	Max	each	Max	each	Max	each	Max	each	Max	each	Max	each
	Watts	₹	Watts	₹	Watts	₹	Watts	₹	Watts	₹	Watts	₹	Watts	₹
2½"	85 w	214 /-	100 w	216 /-	150 w	221 /-	150 w	229 /-	175 w	237 /-	200 w	276 /-		
3"	100 w	218 /-	125 w	223 /-	175 w	227 /-	175 w	239 /-	200 w	248 /-	225 w	287 /-		
3½"	120 w	223 /-	150 w	228 /-	200 w	234 /-	225 w	249 /-	250 w	259 /-	275 w	298 /-		
4"	140 w	227 /-	175 w	235 /-	225 w	240 /-	250 w	259 /-	275 w	270 /-	300 w	309 /-	500 w	424 /-
4½"	150 w	232 /-	200 w	240 /-	250 w	247 /-	275 w	269 /-	325 w	281 /-	350 w	320 /-	500 w	446 /-
5"	175 w	236 /-	225 w	247 /-	275 w	254 /-	300 w	279 /-	350 w	292 /-	400 w	331 /-	500 w	468 /-
5½"	190 w	243 /-	250 w	252 /-	300 w	260 /-	350 w	289 /-	400 w	303 /-	450 w	342 /-	500 w	490 /-
6"	200 w	247 /-	275 w	259 /-	325 w	267 /-	375 w	299 /-	425 w	314 /-	475 w	353 /-	500 w	512 /-
7"	250 w	259 /-	300 w	273 /-	375 w	282 /-	450 w	314 /-	500 w	331 /-	500 w	368 /-	750 w	548 /-
8"	275 w	271 /-	350 w	288 /-	450 w	298 /-	500 w	330 /-	550 w	347 /-	600 w	381 /-	750 w	583 /-
9"	300 w	284 /-	400 w	302 /-	475 w	313 /-	550 w	345 /-	625 w	362 /-	700 w	396 /-	1000 w	618 /-
10"	350 w	295 /-	450 w	316 /-	550 w	329 /-	625 w	360 /-	700 w	378 /-	800 w	411 /-	1000 w	654 /-
11"	375 w	308 /-	500 w	331 /-	600 w	344 /-	700 w	376 /-	800 w	395 /-	875 w	424 /-	1000 w	689 /-
12"	400 w	320 /-	550 w	345 /-	650 w	359 /-	750 w	392 /-	850 w	411 /-	950 w	439 /-	1500 w	725 /-
15"	-	-	-	-	800 w	414 /-	950 w	446 /-	1050 w	487 /-	1200 w	522 /-	---	---
18"	-	-	-	-	1000 w	467 /-	1100 w	502 /-	1250 w	565 /-	1400 w	601 /-	---	---
24"	-	-	-	-	1300 w	575 /-	1500 w	617 /-	1700 w	719 /-	1900 w	767 /-	---	---

DUCT
HEATER





PRICE : Ex-office, subject to change without notice and without taxes.
PAYMENT : 33% Advance alongwith order & the balance against delivery or through Bank.
DELIVERY : Ex-stock or One/two weeks.

FLANGED HEATER

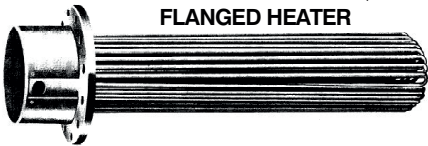

OZONE
HEATER



HIGH DENSITY CARTRIDGE HEATERS

DATE: 01/09/2020

DIAMETER >>>	6.0mm -6.35mm (1/4")		8mm		9.5mm(3/8") - 10mm		12mm-12.5mm-12.7mm (1/2")		14mm		15.5mm-15.8mm (5/8") - 16mm		18mm		19mm (3/4")		20mm		22mm		25mm-25.4mm (1")	
	Length In inch	Length mm	WATTS RANGE	Price Each ₹.	WATTS RANGE	Price Each ₹.	WATTS RANGE	Price Each ₹.	WATTS RANGE	Price Each ₹.	WATTS RANGE	Price Each ₹.	WATTS RANGE	Price Each ₹.	WATTS RANGE	Price Each ₹.	WATTS RANGE	Price Each ₹.	WATTS RANGE	Price Each ₹.	WATTS RANGE	Price Each ₹.
2"	50		80	100	435	125	175	435	125	200	435	150	200	445								
2½"	65		100	125	435	125	175	435	150	275	445	200	300	445	250	350	475	250	400	495	350	500
3"	75		100	125	435	150	225	435	225	350	445	250	375	445	275	400	475	275	400	495	450	600
3½"	90		125	150	435	150	275	435	250	400	445	300	475	445	350	500	475	350	500	495	500	700
4"	100		150	200	435	225	350	435	300	500	445	350	550	445	450	600	475	450	600	495	600	800
4½"	115		150	200	462	250	400	462	350	600	479	400	650	479	500	700	495	500	700	495	650	900
5"	125		200	250	490	300	500	490	400	650	506	500	700	506	600	800	523	600	800	567	700	1000
5½"	140		200	250	517	350	550	517	500	750	539	600	825	539	650	900	572	650	900	600	900	1100
6"	150		250	300	545	400	650	545	600	850	567	650	900	567	700	1000	605	700	1000	638	950	1250
7"	175					450	700	611	700	950	627	750	1000	627	900	1200	671	900	1200	710	100	1450
8"	200					500	750	655	900	1100	688	800	1200	688	1000	1500	737	1000	1500	776	1200	1700
9"	225					600	850	710	950	1250	748	900	1300	748	1200	1700	803	1200	1700	847	1300	1800
10"	250					650	1000	765	1000	1400	809	1000	1500	809	1500	1900	869	1500	1900	919	1400	2000
11"	275								1000	1400	864	1100	1700	864	1600	2100	935	1600	2100	990	1750	2250
12"	300								1000	1500	924	1200	1800	924	1600	2300	1001	1600	2300	1062	1750	2500
15"	375								1200	1800	1106	1400	2000	1106	1750	2500	1199	1750	2500	1271	2000	3000
18"	450											1800	2500	1298	2000	3000	1397	2000	3000	1485	2500	3500
24"	600																			1909	2500	4000

WATTAGE SUGGESTED IS MAXIMUM. KINDLY SELECT LOWER WATTAGE AS PER YOUR REQUIREMENT
MINIMUM ORDER QUANTITY - 6 NOS

STANDARD TERMINAL WIRE PROVIDED IS 12" FIBER GLASS WIRE

RATE FOR DIAMETER 6MM & BELOW ON REQUEST

FOR EXTRA CABLE LENGTH RS. 100 PER METER (FIBRE GLASS, TEFLON & BRAIDED CABLE)

BUILT IN THERMOCOUPLE RS. 300 UPTO 1 METER LENGTH

CONDUIT PIPE , RING, RIGHT ANGLE TERMINATION, OTHER MODIFICATION CHARGES EXTRA AS APPLICABLE



Brand ISI marked Heating Elements




‘Girish-heat’ D shape Split Type Cartridge Heaters are developed for high temperature application. A Helically wound resistance coil is placed inside the tube filled with MgO powder and compacted for faster and efficient heat transfer.

Features: Excellent heat transfer. Longer life. Uniform heat transfer. Can be inserted and removed easily. Hot zone up to the tip of the element.

Applications: Plastic Processing & Packaging Machinery, Injection & Blow Moulding, Extruders, Foundaries, For fastening of Turbine Bolts, Soldering pots

'D' SHAPE SPLIT CARTRIDGE HEATERS (IN SS-321 TUBE)						
TYPE	WATTS	VOLTS	DIAMETER [Ø MM]	LENGTH	PRICE ₹	STD. PKG.
DEE/05/230	500	230	14	230mm-09"	On Request	12
DEE/06/250	600	230	14	250mm-10"		12
DEE/.75/275	750	230	14	275mm-11"		12
DEE/.75/300	750	230	14	300mm-12"		12
DEE/.75/325	750	230	14	325mm-13"		12
DEE/.75/350	750	230	14	350mm-14"		12
DEE/10/400	1000	230	14	400mm-16"		12
DEE/10/450	1000	230	14	450mm-18"		12
DEE/12.5/450	1250	230	14	450mm-18"		12
DEE/15/500	1500	230	14	500mm-20"		12
DEE/10/600	1000	230	14	600mm-24"		12
DEE/15/600	1500	230	14	600mm-24"		12
DEE/20/725	2000	230	14	725mm-29"		12
DEE/20/775	2000	230	14	775mm-31"		12
DEE/20/800	2000	230	14	800mm-32"		12
DEE/20/900	2000	230	14	900mm-36"		12
DEE/20/975	2000	230	14	975mm 39"	12	
also available in Ø12.5, Ø16.5, Ø19mm Dia						

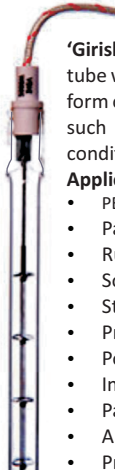

‘Girish-heat’ SW Infrared heater is made of glass tube with element at the centre. As IR is the fastest form of heat & suitable for demanding applications such as vacuum technology and clean room conditions etc.

Applications:

- PET preform heating in stretch blow moulding m/cs.
- Paint baking
- Rubber coating drying.
- Soldering fusing in PCB industries.
- Sterilizing / mirror coating drying in glass Ind.
- Printing ink drying in offset machines.
- Powder coating curing.
- Impregnation plants.
- Paper coating drying.
- All type of laminations.
- Preheating prior to embossing.
- Screen printing curing on T-shirt & textiles

SHORT WAVE INFRA RED QUARTZ HEATERS						
TYPE	HEATED LENGTH HL(MM)	OVERALL LENGTH OL(MM)	WATTS (W)	VOLT (V)	PRICE ₹	STD. PKG
SSW 500	127	212	500	240	On Request	6
SSW 1000	254	348	1000	240		6
SSW 1600 S	406	500	1600	240		6
SSW 1600 D	406	500	1600	415		6
SSW 2000 S	508	626	2000	240		6
SSW 2000 D	508	626	2000	415		6
SSW 2500 D	635	728	2500	415		6
SSW 3000 S	508	626	3000	240		6
SSW 3000 D	765	875	3000	415		6
SSW 2000 SP	1020	1120	2000	240		6



‘Girish-heat’ Ceramic infrared heaters are made of ceramic material with heating element placed uniformly at equi-distance. Ceramic I/R heater produces FAR Infrared and also called dark or black infrared having wavelength between 3-4 µm, having highest efficiency between 3-4 µm wavelength.

Applications

HEATING Plastic for forming. Metal prior to painting. Food * People *Animals*Glass.

DRYING Print * Inks * Adhesives * Varnishes * Paints * Textiles * Sand Pharmaceuticals* Powders

CURING Resins * Rubber * Chemicals * powder coatings.

CERAMIC INFRARED HEATERS			
SIZE	WATTS	PRICE ₹	STD. PKG
245 X 60 HSC	650 W	On Request	6
	1000 W		6
120 X 60 HSC	350 W		6
	500 W		6
120 X 120 HSF	500 W		6
	1000 W		6
HSC= Curved Surface HSF= Flat Surface			
Also available with embedded Thermocouple type “K”. Price will be Rs.250/- extra			

NOTE:

PRICE:Ex-office, subject to change without notice and exclusive of taxes.

PAYMENT:100% payment against Proforma Invoice by RTGS/NEFT or “At par Cheque”

PACKING & FORWARDING charges will be extra

DELIVERY:Ex-stock or One/two weeks.

SUBJECT TO MUMBAI JURISDICTION.

‘GIRISHEGO’ Range of Space Heaters are ideal for prevention of condensation, corrosion. Leakage currents in L.T. & H.T. Switchgear panel boards / electronic instruments & panels etc.

In **Space heaters with perforated body** the specially developed design incorporates a stainless steel sheathed cartridge heating element in perforated sheet metal enclosure. A black powder coated finish ensures rapid heat dissipation. A 2 x 2.5 mm porcelain terminal block is provided for electrical connection.

In **Box type Space heaters** the specially developed design incorporates a high quality Mica insulated Kanthal heating element in aluminum enclosure. A 2 x 2.5 mm terminal block is provided for electrical connection. Two fixing holes are provided at a center distance of 180mm.

In **Aluminium space Heaters** the Body is made of anodized heat sink grade extruded aluminium for Fast dissipation of heat into air. High quality resistance heating element is insulated with mica for optimum insulation even in extreme humid conditions. Resistance element and insulation are held tight in between aluminium parts and squeezed for quick and uniform heating. Heater can withstand much higher degree of mechanical shock and vibration. Elevated body provides for easy passage of heat directly to air, without heating panel body.

Installation can be done in vertical or horizontal position although horizontal mounting is preferred. Distance from surface of panel should be at least 10mm. and distance from plastic parts should be at least 50mm.

Each heater is tested for following specific tests: 1) High Voltage Test At 2Kv/1Min

2) Insulation Resistance > 10 Mega Ohms. 3) Power Rating within ± 5%.

SPACE HEATERS (PERFORATED BODY)

TYPE NO.	WATTS	VOLTS	LENGTH	PRICE EACH	STD. PCKG	DSPCH PCKG
SH/004/145	40	230	145 mm.	₹.200.00	25 Nos.	100 Nos.
SH/006/145	60	230	145 mm.	₹.200.00	25 Nos.	100 Nos.
SH/008/145	80	230	145 mm.	₹.205.00	25 Nos.	100 Nos.
SH/010/175	100	230	175 mm.	₹.215.00	25 Nos.	100 Nos.
SH/015/235	150	230	235 mm.	₹.255.00	25 Nos.	100 Nos.
SH/020/275	200	230	275 mm.	₹.270.00	25 Nos.	100 Nos.
SH/025/275	250	230	275 mm.	₹.285.00	25 Nos.	100 Nos.
SH/030/275	300	230	275 mm.	₹.295.00	25 Nos.	100 Nos.



With Heat Resistant Side covers

SPACE HEATERS (BOX TYPE)

TYPE NO.	WATT	VOLT	TOTAL LNPTH	PRICE EACH	STD. PCKG	DSPCH PCKG
Box-40	40	240	208 mm.	₹.175.00	50 Nos.	50 Nos.
Box-60	60	240	208 mm.	₹.175.00	50 Nos.	50 Nos.
Box-80	80	240	208 mm.	₹.160.00	50 Nos.	50 Nos.
Box-100.	100	240	208 mm.	₹.185.00	50 Nos.	50 Nos.




ALUMINIUM SPACE HEATER (STRIP TYPE)

TYPE NO.	WATTS (230V AC)	TOTAL LENGTH(L)	FIXING HOLE C-TO-C(A)	PRICE EACH	STANDARD PACKING	DISPATCH PACKING
SAL/003/240	30W	240 mm	220 mm ±6	₹.175.00	25 Nos.	100 Nos.
SAL/004/240	40W	240 mm	220 mm ±6	₹.175.00	25 Nos.	100 Nos.
SAL/005/210	50W	210 mm	190 mm ±6	₹.165.00	25 Nos.	100 Nos.
SAL/006/210	60W	210 mm	190 mm ±6	₹.165.00	25 Nos.	100 Nos.
SAL/008/210	80W	210 mm	190 mm ±6	₹.165.00	25 Nos.	100 Nos.
SAL/010/240	100W	240 mm	220 mm ±6	₹.185.00	25 Nos.	100 Nos.
SAL/012/240	120W	240 mm	220 mm ±6	₹.190.00	25 Nos.	100 Nos.
SAL/015/270	150W	270 mm	250 mm ±6	₹.205.00	25 Nos.	100 Nos.
SAL/018/300	180W	300 mm	280 mm ±6	₹.235.00	25 Nos.	100 Nos.
SAL/020/300	200W	300 mm	280 mm ±6	₹.235.00	25 Nos.	100 Nos.
SAL/025/330	250W	330 mm	310 mm ±6	₹.280.00	25 Nos.	100 Nos.



Type: SAL

Type: SAL/C



Type: SALM

Type: SALS



Also available with protection cover

**STEM TYPE THERMOSTATS & THERMAL CUT-OUT
AS PER IS/IEC 60730-2-9:2011 SPECIFICATIONS (OLD IS-3017).**




‘GIRISHEGO’ Range of stem type thermostat are designed to meet a variety of requirements for domestic, industrial and commercial heating systems. Our thermostats come in different shapes & model to suit the individual requirement of application and economy. These are suitable for instant and storage type water heaters, switchgear & panel boards, water and oil baths, moulds, sterilisers, ovens, boilers and other domestic & industrial heating appliances.

PRINCIPLE OF OPERATION: With temp rise, the principle of differential expansion of brass tube and a Nickel/Iron (inver) Rod is used to actuate a highly accurate snap action micro gap switch located in the head which makes it keep the temperature of liquid or solid, constant within the differential i.e. A single pole, single throw, normally closed circuit breaks (opens) on rise of temperature.

CONSTRUCTION: The micro gap switch assembly is mounted on a heat resistant base, with rigid brass pillar terminals. Heavy duty Ag cdo contacts are provided for long trouble free life. A thermoplastic/thermosetting cover with clear and precise graduations is provided along with a setting knob. A spring steel clip is provided for snap on fixing of Thermostat. It can be fixed in any position. Thermostats are available in three standard stem lengths of 7" (175 mm), 11" (275 mm), 18" (450 mm) with tube diameter of 5/16" (8 mm)

AVAILABLE ON REQUEST: 1) Smaller stem lengths of 4½" (115 mm) & 5" (125 mm). 2) Normally Open Contacts. (N.O.C.). 3) Preset at fixed temperature. 4) Higher insulation resistance & H.V. for switchgear and panel boards. 5) 20 amp. Thermostats.

<u>Model</u>	<u>Stem length</u>	<u>Range</u>	<u>Price Per Piece</u>	<u>Local Packing</u>	<u>Dispatch Packing</u>
<u>ROUND SHAPE THERMOSTAT 15 AMP 250 V A.C.</u>					
200-C	175 MM	0-60 °C	₹. 180.00	25 Nos.	100 Nos.
205-C	175 MM	30-85 °C	₹. 165.00	50 Nos.	100 Nos.
208-C	175 MM	25-125 °C	₹. 180.00	25 Nos.	100 Nos.
210-C	175 MM	25-150 °C	₹. 190.00	25 Nos.	100 Nos.
215-C	175 MM	50-200 °C	₹. 190.00	25 Nos.	100 Nos.
305-C	275 MM	25-85 °C	₹. 180.00	25 Nos.	100 Nos.
306-C	275 MM	5-90 °C	₹. 210.00	25 Nos.	100 Nos.
308-C	275 MM	25-125 °C	₹. 210.00	25 Nos.	100 Nos.
310-C	275 MM	25-150 °C	₹. 210.00	25 Nos.	100 Nos.
315-C	275 MM	25-200 °C	₹. 210.00	25 Nos.	100 Nos.
410-C	450 MM	25-150 °C	₹. 320.00	25 Nos.	50 Nos.
For Normally Open Contacts (N.O.C.) Thermostat ` . 50/- Extra on List Price.					
<u>ROUND THERMOSTAT WITH LONG FIXING BRACKET 15 AMP 250 V A.C.</u>					
205-LB	175 MM	30-85 °C	₹. 170.00	50 Nos	100 Nos.
<u>“POPULAR” MODEL THERMOSTATS 15 AMP 250 V A.C.</u>					
GEC-5	125 MM	30-80 °C	₹. 110.00	100 Nos.	400 Nos.
GEC-7	175 MM	30-75 °C	₹. 115.00	100 Nos.	400 Nos.
GEC-11	275 MM	30-75 °C	₹. 125.00	100 Nos.	400 Nos.
<u>“DLX” MODEL THERMOSTAT WITH FIXING BRACKET 15 AMP 250 V A.C.</u>					
DLX-5-LB	125 MM	20-80 °C	₹. 125.00	100 Nos.	400 Nos.
DLX-7-LB	175 MM	25-85 °C	₹. 125.00	100 Nos.	400 Nos.
DLX-11-LB	275 MM	25-85 °C	₹. 135.00	100 Nos.	400 Nos.
DLX-7-L	175 MM	25-85 °C	₹. 130.00	100 Nos	400 Nos.
DLX-7-125-L	175 MM	25-125 °C	₹. 135.00	100 Nos.	400 Nos.
<u>SQUARE (BIG) THERMOSTATS 15 AMP 250 V A.C.</u>					
GEO-11	275 MM	30-75 °C	₹. 240.00	25 Nos.	100 Nos.
<u>THERMAL CUT-OUT 20 AMP 250 V A.C.</u>					
TCO-TOP-7	175 MM	set at 90 °C	₹. 120.00	100 Nos.	400 Nos.
TCO-TOP-11	275 MM	set at 90 °C	₹. 130.00	100 Nos.	400 Nos.
<u>THERMOSTAT POCKET</u>					
Pocket-7"	₹. 140.00	Pocket-11"	₹. 160.00	Pocket-18"	₹. 285.00
					25 Nos.

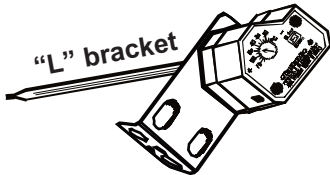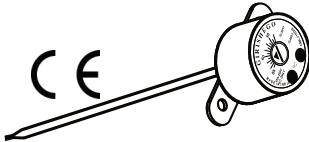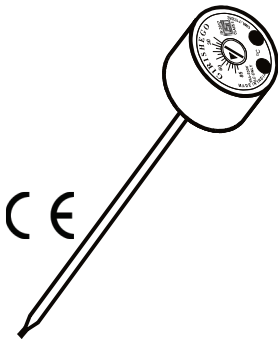

EX-GODOWNS BASIS # TAXES EXTRA # EX. STOCK # DOCUMENTS THROUGH BANK.